


HINGE - DOUBLE GUARD

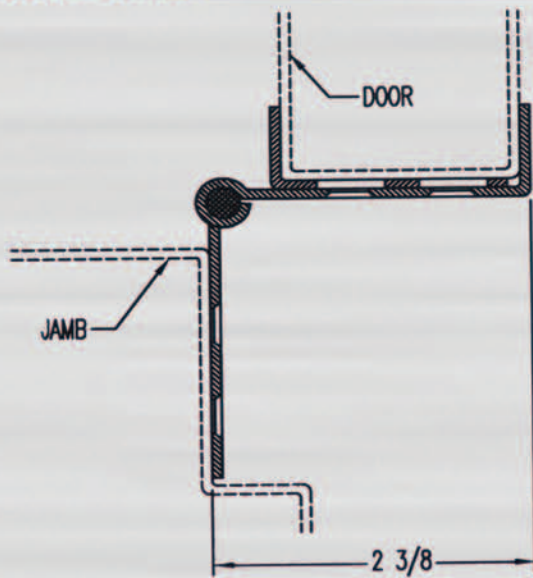

Finishes

- LS305-630 (satin stainless steel)
- LS305-629 (bright stainless steel)
- LS205-631 (nickel plated, blackened, clear coated)
- LS205-633 (satin brass plated, clear coated)
- LS205-645 (bright nickel plated, clear coated)
- LS205-646 (satin nickel plated, clear coated)
- LS205-663 (zinc plated, clear chromate seal)
  
- Material: 0.075" stainless steel
  
- Lengths: 79.160", 83.118", 83.771", 85.097", 94.992", 118.740"  
 custom lengths available
  
- Holes: pierced and countersunk for # 10 FH screw
  
- Assembly: assembled with flange bearings and stainless steel end caps

Fire rating

- 3 hours - hollow metal doors mounted singly
- 90 minutes - hollow metal and composite core wood fire doors
- 20 minutes - wood doors

Listed by UL/ULC to the following Canadian and US Safety Standards:

- CAN4-S104-80M - standard method for fire tests of door assemblies
- UL10C - positive pressure fire tests of door assemblies



